




NWB041-3

PATIENT TRANSPORTATION TROLLEY



NWB041-3

FEATURES AND HIGHLIGHTS



Technical parameters

▪ External size (LxW):	2100x850 mm
▪ Table height adjustment:	630-930 mm
▪ Back plate adjustment:	0-75° (±10°)
▪ Knee-rest adjustment:	0-45°
▪ Reverse Trendelenburg:	0-15°
▪ Trendelenburg:	0-15°



Technical configuration

<input checked="" type="checkbox"/> Usa hydraulic pump	2 pcs
<input checked="" type="checkbox"/> Crank system	1 set
<input checked="" type="checkbox"/> Back rest air spring	2 pcs
<input checked="" type="checkbox"/> 8" German castors,central locking	2 pcs
<input checked="" type="checkbox"/> Emergency push handle	1 set
<input checked="" type="checkbox"/> Directional wheel	1 pc
<input checked="" type="checkbox"/> Folding side rail	1 set
<input checked="" type="checkbox"/> Φ74mm wall bumper wheel	4 pcs
<input checked="" type="checkbox"/> Iv pole previsions	4 pcs
<input checked="" type="checkbox"/> Mattress	1 pc
<input checked="" type="checkbox"/> IV pole	1 set
<input checked="" type="checkbox"/> Central locking break pedal	2 sets
<input checked="" type="checkbox"/> Directional wheel release pedal	2 pcs
<input checked="" type="checkbox"/> X-ray translucent bed platform	1 set





Metal material

Baosteel from Fortune Global 500
Panasonic Robotic ensure 360° full smooth
wedding.



Plastic

Environmental plastic can be sterilized in
100°C, tensile upto 30MPa.




Steels | Painting

11 Process epoxy painting, ASTM testing anti-
bacterial, paint thickness 0.12 mm, brightness 60°,
paint can resist 50 kg impact.



Brake

Break spring keep qualified after 10,000times
uninteruped break.

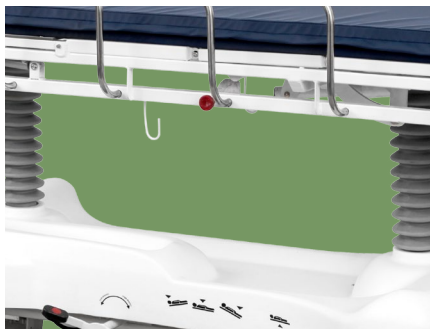


Hydraulic pumps

Height adjustment, trendelenburg and revised
tendelenburg through two USA hydraulic pumps.



Center wheel

Can be engaged to facilitate direction control,
enabling users to navigate the stretcher easily in
hectic and dynamic environments.

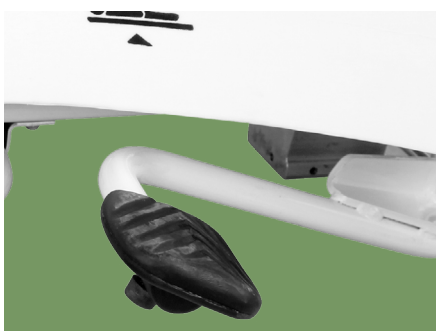

Rising

Hydraulic treadle for rise.



Falling

① Leg section lows down to make head highter.
② Back section lows down to make leg section
highter.
③ Step on the middle of the pedal, make the bed
base fall down steadily.



Castors

Four double side casters of 6 inch diameter,
simultaneously lockable by the step pedal at both
sides.
TPR tire no worn out after running 30KM, save
anti-winding hard shell, united forming without
bolts.



Mattress

Waterproof PU mattress, convenient for transfer patient.



Side rail

Foldable aluminium alloy guardrail




Bumper wheel

Bumper wheel detachable, max. protect the bed and patient during transportation



Drainage Hooks

Mobile plastic drainage hooks.

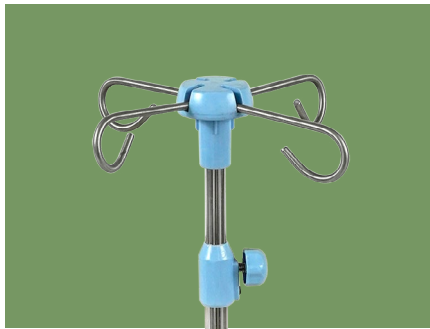

IV pole

Stainless Steel Column with plastic hook.



NUMBER WIN

MEDICAL TECHNOLOGY

As the circumstance of printing, the photos might have minor difference on color, tactile from real products.
As the update of design and improvement, parameters and outlook of products might change, thanks for understanding.



7x24

Online 24 Hours for Sales Service
Timely Response for Clients' Problems

+86 18021231901

Suzhou Number Win Medical Technology Co.,Ltd.

No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China

export@number-win.com

www.number-win.com



Company video



General catalogue