



# NWD802

## MULTIFUNCTIONAL ICU ELECTRIC BED

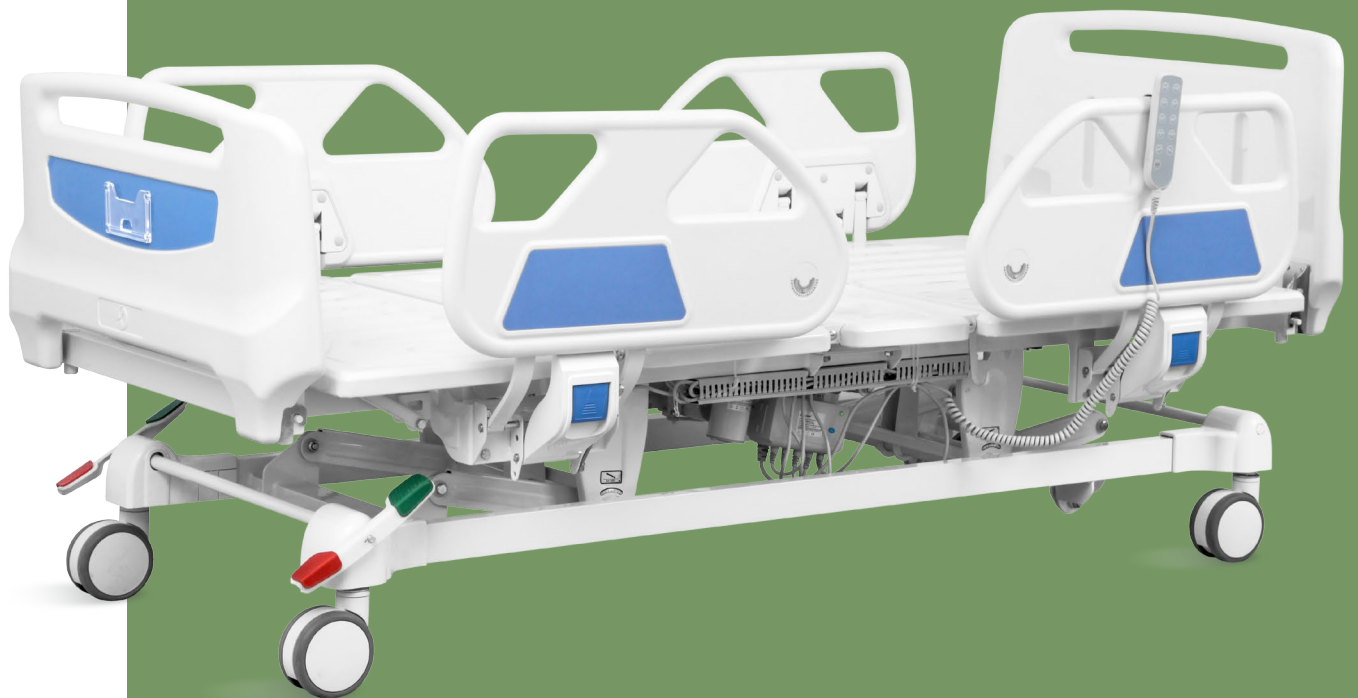


# NWD802

## FEATURES AND HIGHLIGHTS

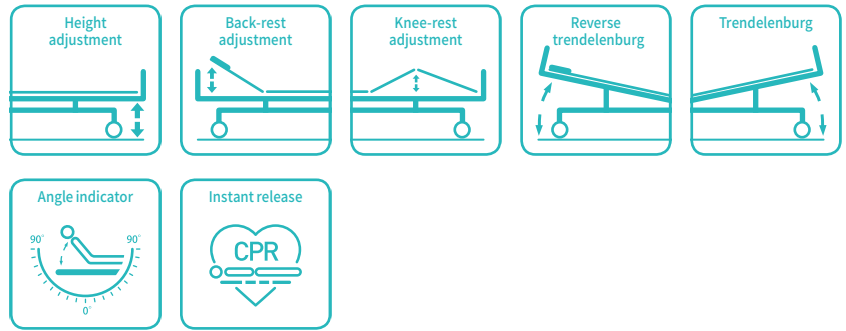

### Technical parameters

▪ External size (LxW):	2170x1065 mm
▪ Mattress platform:	1925x900 mm
▪ Safe working load:	250 kg
▪ Height adjustment:	435-725 mm
▪ Back-rest adjustment:	0-75° (±10°)
▪ Knee-rest adjustment:	0-35° (±10°)
▪ Reverse Trendelenburg:	0-12°
▪ Trendelenburg:	0-12°
▪ Angle indicator:	0-90°
▪ Voltage and frequency:	100-240 V · 50/60 Hz
▪ Plug as required (hospital grade)	

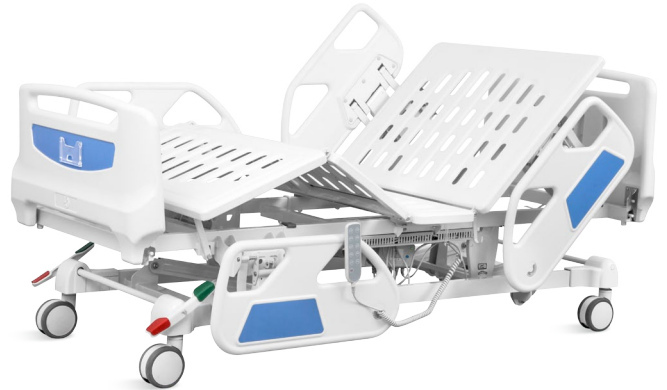


### Technical configuration


<input checked="" type="checkbox"/> Linear Motor	4 pcs
<input checked="" type="checkbox"/> 5" Double Side Castors, Central Locking	4 pcs
<input checked="" type="checkbox"/> ABS Side Rail Extra Height	1 set
<input checked="" type="checkbox"/> ABS Bed Ends with Integrated Control Panel	1 set
<input checked="" type="checkbox"/> IV Pole	1 set
<input checked="" type="checkbox"/> IV Pole Prevision	4 pcs
<input checked="" type="checkbox"/> Drainage Hook	2 pcs
<input checked="" type="checkbox"/> Central Locking Pedal	2 pcs
<input checked="" type="checkbox"/> Electric CPR	



### Optional

<input type="checkbox"/> Manual CPR	
<input type="checkbox"/> Weighing System	
<input type="checkbox"/> Back-up Battery	
<input type="checkbox"/> X-ray Bed Surface	
<input type="checkbox"/> Monkey Pole	
<input type="checkbox"/> Balkan Traction Frame	
<input type="checkbox"/> Directional Wheel	

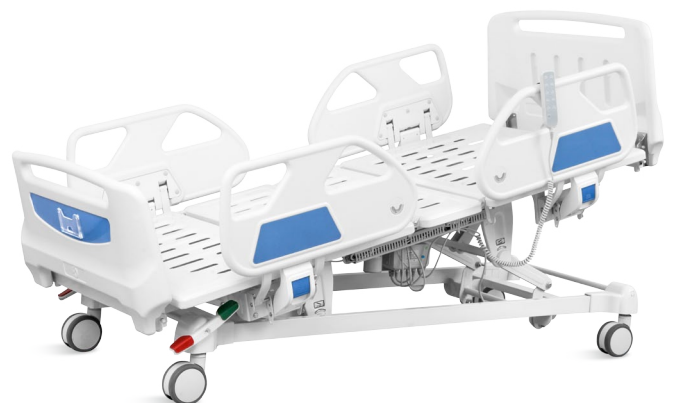

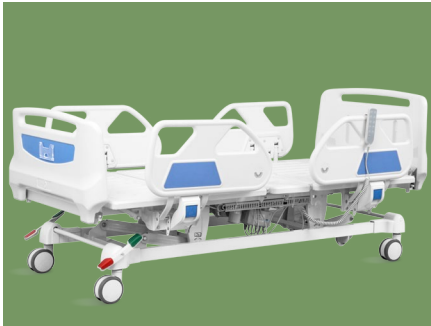

### Design

E-shaped large guardrail, with angled display and built-in controller, meets safety standards, providing comforting feeling for patients.



### Steels | Painting

Baosteel from Fortune Global 500.  
11 Process epoxy painting, ASTM testing anti-bacterial, paint thickness 0.12 mm, brightness 60°, paint can resist 50 kg impact.



### Welding | Chassis

Panasonic robotic ensure, 360° full smooth wedding.  
Solid bed base made of 5.0 mm stamped rotating plate.




### Electric Motor

Linear motor, with UL/ROHS/EN standard.  
Noise under 50 dB, with lifetime 20,000 times movement.



### Virgin ABS

Environmental plastic can be sterilized in 100°C, tensile upto 30MPa.

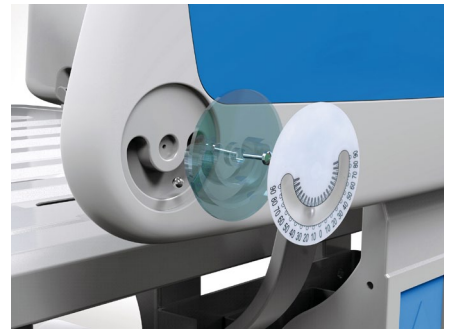

### Angle Indicator

Patented angle indicator.



### Wheels

Secure® Castors  
Pass Dynamic test: Bearing 120kg run 30KM and pass obstacles 500time.



### Durable Brakes

Break spring keep qualified after 10,000 times uninterrupted break.



### Bed Surface

Stamping forming platform, smooth surface no welding scar, bearing 250 kg load. Option ABS platform and resin X-ray translucent platform.



#### Side Rail

Full ABS material,tuck away side rail with built-in controller.  
From top of the guardrail to bed surface is about 345mm, more height provides better protection for patient.  
Bottom can endure 100,000times press, buffer, built-in angle indicator.



#### Head & Foot Board

Full ABS material, Bottom can endure 100,000times press  
Head and foot board can be reversible.



#### Drainage Hooks

Mobile plastic drainage hooks.



#### IV pole

Stainless Steel Column with plastic hook.



As the circumstance of printing, the photos might have minor difference on color, tactile from real products.  
As the update of design and improvement, parameters and outlook of products might change, thanks for understanding.

# NUMBER WIN

MEDICAL TECHNOLOGY



## 7×24

Online 24 Hours for Sales Service  
Timely Response for Clients' Problems

+86 18021231901

Suzhou Number Win Medical Technology Co.,Ltd.

No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China

export@number-win.com

www.number-win.com



Company video



General catalogue