


# NWD805

## MULTIFUNCTIONAL ELECTRIC BED



# NWD805

## FEATURES AND HIGHLIGHTS

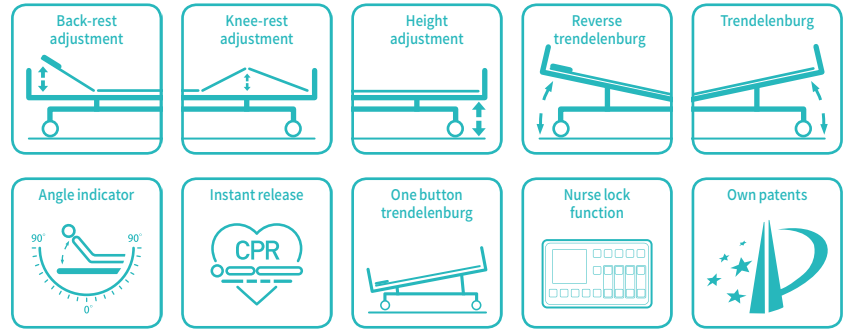

### Technical parameters

▪ External size (LxW):	2280x1090 mm
▪ Mattress platform:	1925x900 mm
▪ Safe working load:	250 kg
▪ Height adjustment:	435-725 mm
▪ Back-rest adjustment:	0-75° (±10°)
▪ Knee-rest adjustment:	0-35° (±10°)
▪ Reverse Trendelenburg:	0-12°
▪ Trendelenburg:	0-12°
▪ Angle indicator:	0-90°
▪ Voltage and frequency:	100-240 V · 50/60 Hz
▪ Plug as required (hospital grade)	




### Technical configuration

<input checked="" type="checkbox"/> Manual CPR	
<input checked="" type="checkbox"/> One button stop	
<input checked="" type="checkbox"/> One button trendelenburg	
<input checked="" type="checkbox"/> Nurse lock system	
<input checked="" type="checkbox"/> Angle indicator for back-rest and Trendelenburg position	4 pcs.
<input checked="" type="checkbox"/> Linear motor	4 pcs.
<input checked="" type="checkbox"/> 5" double side castors with central locking system	4 pcs.
<input checked="" type="checkbox"/> ABS side rail with integrated control panel	1 set
<input checked="" type="checkbox"/> ABS bed ends with integrated LCD control panel	1 set
<input checked="" type="checkbox"/> φ85 mm wall bumper wheel	4 pcs.
<input checked="" type="checkbox"/> Trapeze socket	2 pcs.
<input checked="" type="checkbox"/> IV pole	1 set
<input checked="" type="checkbox"/> IV pole prevision	4 pcs.
<input checked="" type="checkbox"/> Drainage hook	2 pcs.
<input checked="" type="checkbox"/> Central locking pedal	2 pcs.

### Optional

<input type="checkbox"/> Electrical CPR	
<input type="checkbox"/> Weighing system with LCD Screen	
<input type="checkbox"/> Bed extension	
<input type="checkbox"/> Back-up battery	
<input type="checkbox"/> Cardiac position	
<input type="checkbox"/> ABS bed surface	
<input type="checkbox"/> X-ray bed surface	
<input type="checkbox"/> Monkey pole	
<input type="checkbox"/> Balkan traction frame	
<input type="checkbox"/> Directional wheel	
<input type="checkbox"/> Basic foam mattress (12 cm thickness)	
<input type="checkbox"/> Anti-decubitus foam mattress (14 cm thickness)	
<input type="checkbox"/> Vertical oxygen holder	
<input type="checkbox"/> Single arm lifting pole	
<input type="checkbox"/> Utility shelf	

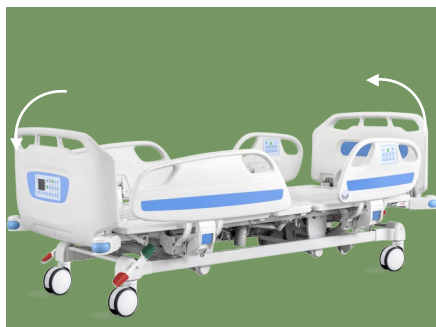

### Head and Foot Board

Extra long and height head foot board, with curve surrounded design, provide comforting feeling for patients.



### Bed Surface

Stamping forming platform, smooth surface no welding scar, bearing 250 kg load. Option ABS platform and resin X-ray translucent platform.



### Welding | Chassis

Panasonic robotic ensure, 360° full smooth welding.  
Solid bed base made of 5.0 mm stamped rotating plate.



### Electric Motor

Linear motor, with UL/ROHS/EN standard.  
Noise under 50 dB, with lifetime 20,000 times movement.



### Steels | Painting

Baosteel from Fortune Global 500.  
11 Process epoxy painting, ASTM testing anti-bacterial, paint thickness 0.12 mm, brightness 60°, paint can resist 50 kg impact.



### Virgin ABS

Environmental plastic can be sterilized in 100°C, tensile upto 30MPa.



### LCD

Unique design head foot board with built-in controller. 4.3 inch LCD display, shows moving angle. Button can endure 100,000 times press.




### Side Rail

Tuck away side rail with buffer, built-in controller and angle indicator.



### Wheels

TPR tire no worn out after running 30 km, save anti-winding hard shell, united forming without bolts. Pass dynamic test: Bearing 120 kg, run 30 km and pass obstacles 500 time.

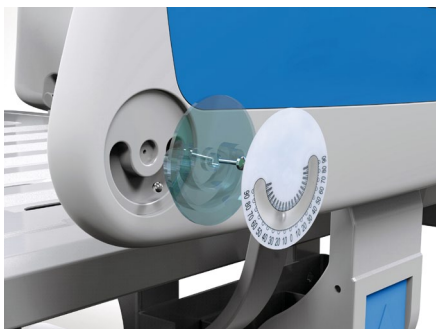

#### Angle Indicator

Patented angle indicator.



#### Bumper Wheels

Patented bumper wheel detachable, max. protect the bed and patient during transportation.



#### Safety

IEC60601 Safety Standard.



#### Drainage Hooks

Mobile plastic drainage hooks.



#### IV pole

Stainless Steel Column with plastic hook.



#### Optional

Battery: 18 times movement with 100 kg bearing, 130 times movement without bearing.  
Nurse control board.  
Storage rack under foot board drawer.  
Store control board or linens.  
Utility basket: big size 600x540x80 mm.



#### Durable Brakes

Break spring keep qualified after 10,000 times uninterrupted break.



As the circumstance of printing, the photos might have minor difference on color, tactile from real products.  
As the update of design and improvement, parameters and outlook of products might change, thanks for understanding.

# NUMBER WIN

MEDICAL TECHNOLOGY



## 7×24

Online 24 Hours for Sales Service  
Timely Response for Clients' Problems

+86 18021231901

Suzhou Number Win Medical Technology Co.,Ltd.

No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China

export@number-win.com

www.number-win.com



Company video



General catalogue